


ATK 1500-3000 S2

MATERIAL:	ACERO S355J2
TRATAMIENTO INTERIOR:	VITRIFICADO
PRESIÓN DE FTO:	10 bar
PRESIÓN DE PRUEBA:	13 bar
TEMPERATURA MÁXIMA DE FTO:	95 °C
ÁNODO INCORPORADO:	MAGNESIO

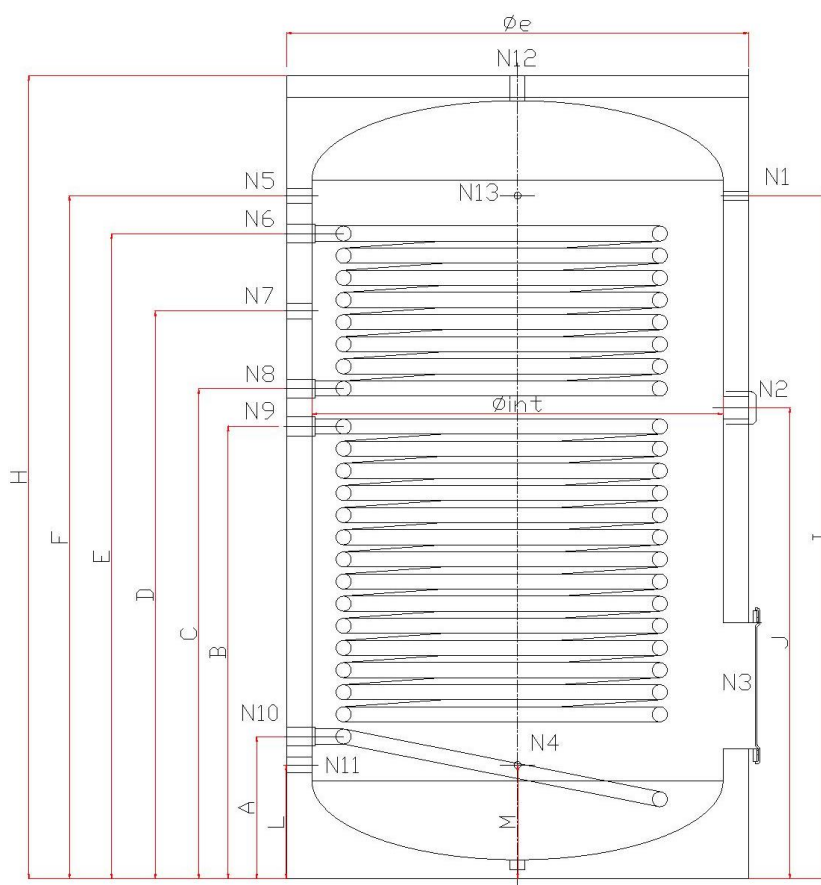

COTAS DESDE LA BASE DEL ACUMULADOR (mm)

	ATK 1500 S2	ATK 2000 S2	ATK 2500 S2	ATK 3000 S2
A	42,5	51,5	39	45
B	114,5	129,5	123	143
C	129,5	139,5	140	155
D	144,5	154,5	154	179,5
E	159,5	175,5	175	204
F	197,5	183,5	187	216
H	230	230	220	254
I/M	197,5/32,5	183,5/43,5	176/36	216/36
J	122	135,5	132	149
L	32,5	43,5	25	36
K	56,3	66,3	58	59

DIÁMETROS DE LAS BOCAS

	ATK 1500 S2	ATK 2000 S2	ATK 2500 S2	ATK 3000 S2
N1	2 "	2 "	2 "	2 "
N2	5 "	5 "	5 "	5 "
N3	1/2 "	1/2 "	1/2 "	1/2 "
N4-N13	1 1/4 "	1 1/4 "	1 1/2 "	1 1/2 "
N5-N11	1 1/4 "	1 1/4 "	1 1/2 "	1 1/2 "
N6-N8	1 1/4 "	1 1/4 "	1 1/2 "	1 1/2 "
N7	1 1/4 "	1 1/4 "	1 1/2 "	1 1/2 "
N9-N10	1 1/4 "	1 1/4 "	1 1/4 "	1 1/4 "
N12	2 "	2 "	2 "	2 "
T(mm)	SP/80	SP/80	SP/80	SP/80

